



AS2890.3 Quick Overview

This quick checklist is designed to give you the main things to look for in meeting the standard. Be sure to have a copy of the standard or call our offices for more assistance including our free design service.

1. AS2890.3 is not a mandatory standard but its compliance is required if the project is aiming for Green Star rating using bicycle parking guidelines.



2. The footprint for each bike needs to be 1800mm long by 500mm wide for horizontal bike parking. For vertical racks allow 1200mm long by 500mm wide. Vertical racks if staggered in height also need to be 500mm apart and separated by 300mm in height.

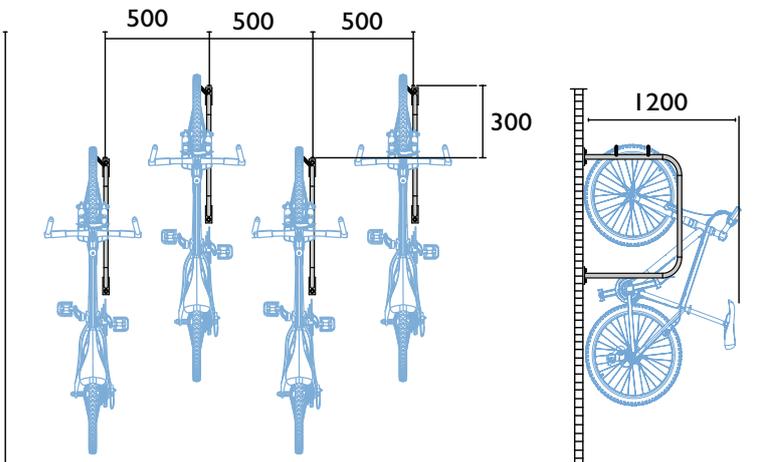

3. Aisles should be 1500mm or 2000mm wide for dual height and lockers.

